

Flange output shaft (similar ISO 9409-1)


Materials / Surfaces:


Input flange: Aluminum / untreated
 Housing: Steel / heat-treated and post-oxidized (black)
 Output flange: Steel / untreated

Hints:

Please pay attention to the operating and mounting instructions.
 Subject to modifications.

Variables on the drawing are dependent upon the motor.
 The given dimensions are exemplary

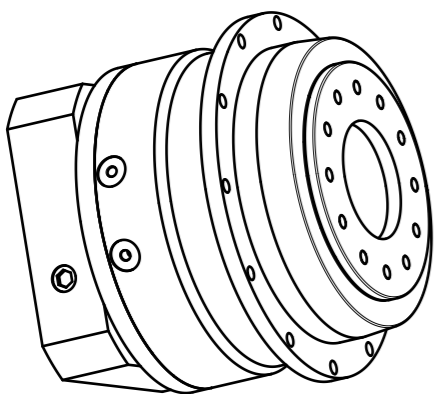

	Scale: 3:10	DIN A3	ISO
	Revision status: Q from: 05/2022		
Changed revision status: P from: 01/2021			
General tolerance DIN ISO 2768-cL	PLFN200-aii-SSSD3AK-Z(D20) /(L20)/(D21)/(D22)/B5/(G3)		
Neugart GmbH Keltenstr. 16 D-77971 Kippenheim			Sheet 1/2

General gearbox data	Character	Unit	
Planetary gearbox - gearing type	-	-	Straight teeth
Rotation direction	-	-	Input and output in the same direction
Number of stages	p	-	1-stage
Output shaft bearing	-	-	Tapered roller bearing
Service life (L10h)	t_L	h	20.000
Max. operating temperature	T_{min} / T_{max}	°C	-25 / +90
Protection class	-	-	IP 65
Lubrication (Lifetime lubrication)	-	-	Standard lubrication (Castrol Optigear Synthetic 800/150)
Installation position	-	-	Any
Max. bending moment based on the gearbox input flange (for motor weight) (1)	M_b	Nm	300
Motor shaft concentricity / Coaxiality and axial runout Motor flange	-	mm	0,015 / 0,03 (Measuring methods according to DIN EN 50347)
Required motor shaft tolerance	-	-	j6; k6
Min. permissible motor shaft length	$L_{20 min}$	mm	37
Reference operating mode	-	-	S1
Reference operating factor	K_A	-	1
Reference speed	n_2	rpm	100
Reference ambient temperature	T_{Amb}	°C	20
Radial force for output bearing based on shaft end after L10h=20,000h with $F_a=0N$	$F_r 20.000h$	N	33000
Axial force for output bearing based on gearbox axis after L10h=20,000h with $F_r=0N$	$F_a 20.000h$	N	+25000 / -15000
Radial force for output bearing based on shaft end after L10h=30,000h with $F_a=0N$	$F_r 30.000h$	N	29500
Axial force for output bearing based on gearbox axis after L10h=30,000h with $F_r=0N$	$F_a 30.000h$	N	+25000 / -13500
Maximum radial force based on shaft end and $T_2=0Nm$	$F_r Max$	N	33000
Maximum axial force based on gearbox axis and $T_2=0Nm$	$F_a Max$	N	+25000 / -15000

$$(1) \text{ Max. motor weight* in kg} = \frac{0,2 \times M_b}{\text{motor length in m}}$$

- * with symmetrically distributed motor weight
- * with horizontal and stationary mounting

Ratio-dependent gearbox data	Character	Unit					
Ratio	aii	-	4	5	7	8	10
Nominal output torque	T_{2N}	Nm	1300	1600	1300	1000	630
Max. output torque for 30.000 output shaft rotations	T_{2max}	Nm	2080	2560	2080	1600	1008
Emergency stop torque permitted 1000 times	T_{2stop}	Nm	2700	3200	2600	2600	1350
Average idle torque for $n_1=3.000$ rpm and 20 °C gearbox temperature	T_0	Nm	25,8	17,1	9,5	7,9	6
Average thermal input speed at 50% T_{2N} , S1, and T_{Amb} Operating temperature may not be exceeded!	$n_{1N 50\%}$	rpm	500	600	850	1000	1300
Average thermal input speed at 100% T_{2N} , S1, and T_{Amb} Operating temperature may not be exceeded!	$n_{1N 100\%}$	rpm	400	450	650	800	1150
Max. mechanical input speed Operating temperature may not be exceeded!	$n_{1 Limit}$	rpm	6000	6000	6000	6000	6000
Torsional backlash based on output shaft	j_t	arcmin	< 3	< 3	< 3	< 3	< 3
Torsional stiffness based on output shaft	c_g	Nm/arcmin	520	636	429	420	330
Efficiency at T_{2N} , gearbox temperature 70 °C and $n_1=1.000$ rpm	η	%	97	97	97	96	95
Running noise at $n_1=3.000$ rpm without load at a distance of 1m	Q_g	dB(A)	74	74	74	74	74
Gearbox weight	m_G	kg	37	37,2	37,8	37,9	39,2
Mass moment of inertia based on clamping system diameter input	J	kgcm ²	61,17	45,22	34,183	31,231	26,88

Subject to modifications.



PLFN200-aii-SSSD3AK-Z(D20)
/(L20)/(D21)/(D22)/B5/(G3)

Sheet 2/2

Revision status: Q from: 05/2022